

MULTI PROJECTOR MP-15E



Focus on the presentation and not the peripherals

- Change between five media sources without changing your equipment.
- Zoom in on solid objects, transparencies, or PC images.
- Vary your projected image from 25 to 252 inches and make easy keystone corrections to suit audiences of any size.
- Add sound to your presentation with built-in 1.5 x 1.5 watt stereo speakers.
- Simple one-touch operation lets you concentrate on the project and not the projector.


Five display options in one package

- Documents & Photographs
- 3D Solid Objects
- Data (PC/Mac Images)
- Video (RCA/S-VHS/DVD)
- Transparencies

Built-in laser pointer Remote controller

Simple input and adjustment of various functions including:

- Document Rotation
- Freeze
- Zoom and Scroll
- Keystone Correction

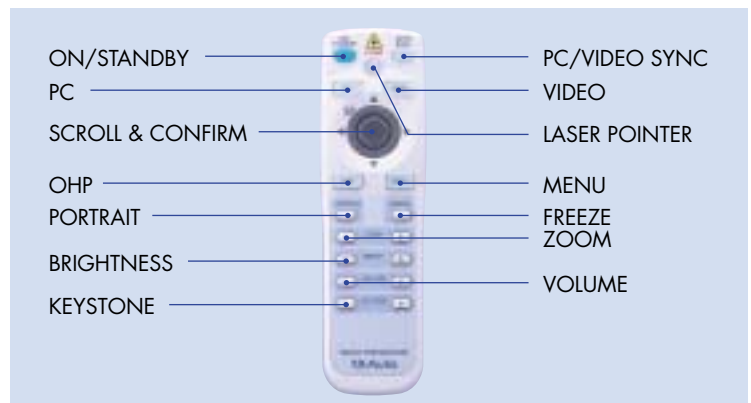

MP-15E Specifications

Panel Type	0.9-inch TFT LCD x 3 pieces, aspect ratio 4:3	
Resolution	XGA (1,024 x 768)	
PC Compatibility	VGA to SXGA	
Projection Lens	Manual zoom (1 – 1.2 times) f:36-43.2mm F:2.3-2.6	
Light Source	150W super-high-pressure mercury lamp	
Screen Size	Min. 25 inches – Max. 252 inches (projection distance 1.15m – 10m)	
Color Reproducibility	Full color (16.77 million colors)	
Light Output/Center to Edge	1,100 ANSI lumens/85%	
Contrast Ratio	400:1	
Sound Output	1.5W x 1.5W stereo speakers	
Compatible Scanning Frequency	Horizontal	15 – 80KHz
	Vertical	50 – 75Hz
Keystone Correction	+/- 15 degree adjustable	
Analog RGB Input/Output	Input Terminal (Image)	Mini D-sub 15 pins x 1
	Input/Output Terminal (Sound)	Stereo mini-jack x 1
	Output Terminal (Image)	Mini D-sub 15 pins x 1
	Zoom	4X zoom
Video Input/Output	Input Signal Type	NTSC, PAL, SECAM, Y/C
	Input Terminal (Image)	RCA pin x 1, S-Video terminal (Mini DIN 4 pins x 1)
	Input Terminal (Sound)	RCA pin (L/R) x 1
Operational Environment	Temperature 0 – 35°C, humidity 20 – 80% (no condensation)	
Input Power	100-120 VAC/220-240 VAC	
Power Consumption	250W	
External Dimensions	298(W) x 398(D) x 190(H)mm excluding projected section	
Weight	5.4kg (approx. 12 lbs.)	
Standard Accessories	Power cable (3m), personal computer interface cable, (2m, Mini D-sub 15 pins), remote controller, lens cover, instruction manual, batteries (AA x 2),	
Document Camera	1/2-inch color CCD 2,000,000 pixels	
	4 frames/second scan speed	
	Resolution	760 TV lines (horizontal resolution)



NIPPON AVIONICS CO.,LTD.

Overseas Department

20-1, Nishi-Shinbashi 3-chome, Minato-ku Tokyo 105-0003, Japan

Phone: 81-3-5401-7386 Fax: 81-3-5401-7344

URL <http://www.avio.co.jp/>

Printed in Japan